



FUMEO 16mm PROJECTORS



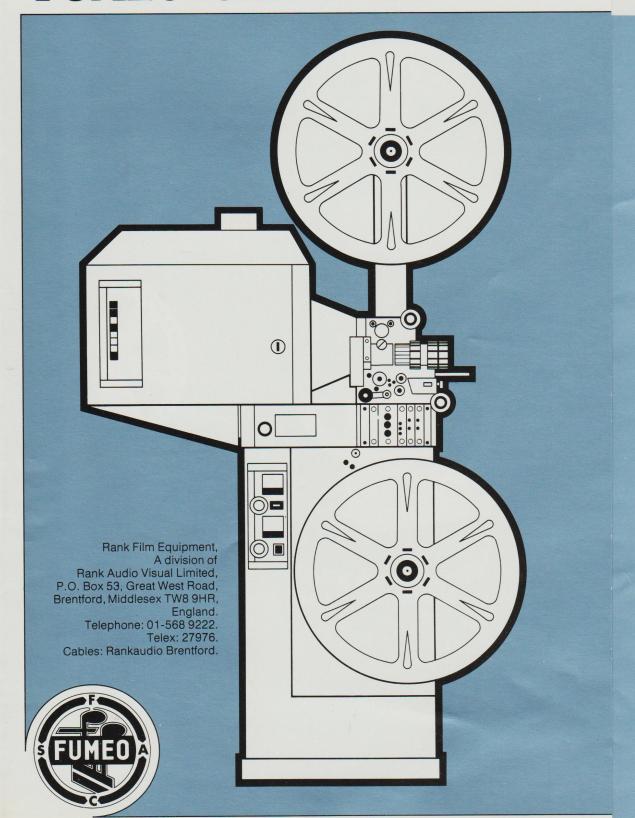

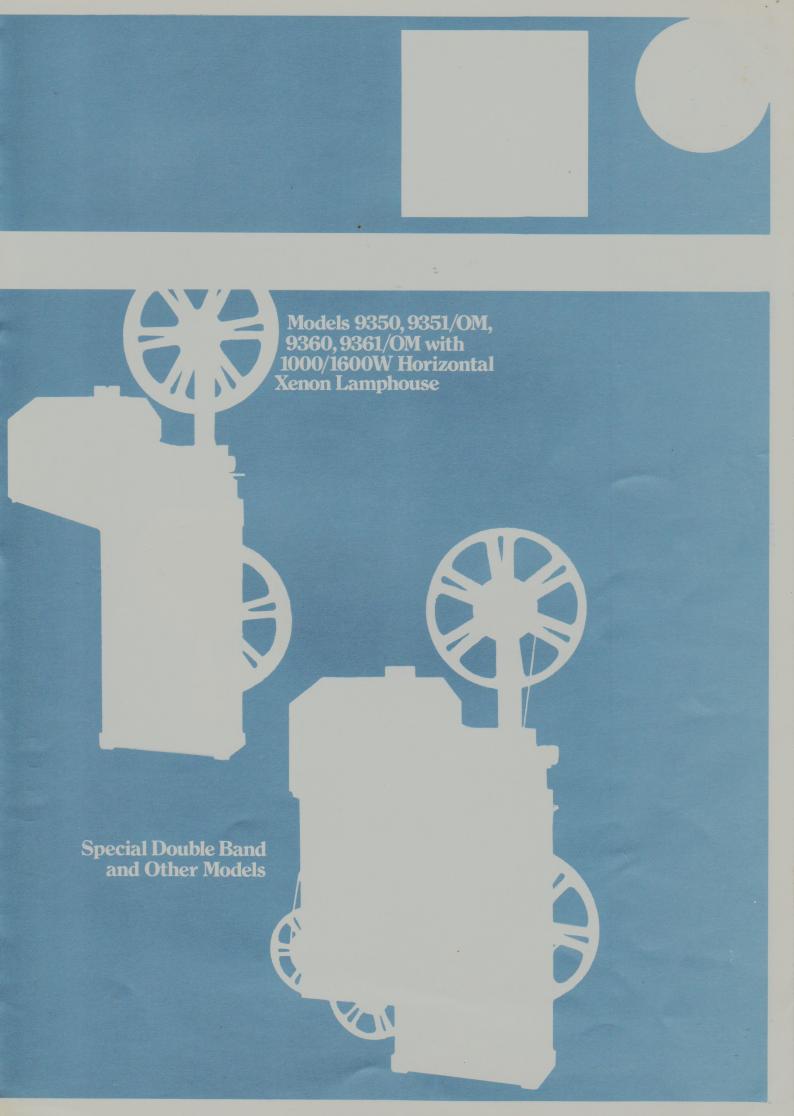

Specification

Projectors

POWER INPUT (all models):

200-250V 50kHz single phase. Other inputs on request.

PROJECTION SPEED:

24 f.p.s. Others on request.

MOTOR:

Asynchronous 4-pole, tooth belt coupled. Others on request.

Sound System (modular)

OPTICAL PRE-AMPLIFIER:

Model OPR 5034 output OdB/600 ohms (optional transformer for balanced output).

MAGNETIC PRE-AMPLIFIER:

Model MPR5035, single track.

POWER SUPPLY:

Model PS5036 twin power supply for pre-amps and 6V1A exciter lamp.

1000/1600W version 156 Kg.

POWER AMPLIFIER:

Model PA5032 40W/8ohms with level, bass and treble controls and PS5033 associated 55V DC power supply.

OPTIONAL EQUALIZER UNIT:

Model FU5041 consisting of presence filter centred at 2.8kHz with 0, 2, 4, 6, 8, 10dB gain or attenuation, low cut filter with 0, 3, 6, 12dB attenuation at 63Hz, high cut with 0, 3, 6, 12dB attenuation at 6.3kHz.

Dimensions 400mm 330mm 1000/1600W 900W 500W 1 7. = 440mm 2120mm 1800mm 1800m. 1230mm 560mm 240mm-Weight without rectifier: 500W version 162 Kg. 1220mm 900W version 135 Kg.