


The synthesis of our proven 35 mm projector head, lamphouse and reel tower results in a complete, inexpensive and space saving projection system that guarantees first class presentations.

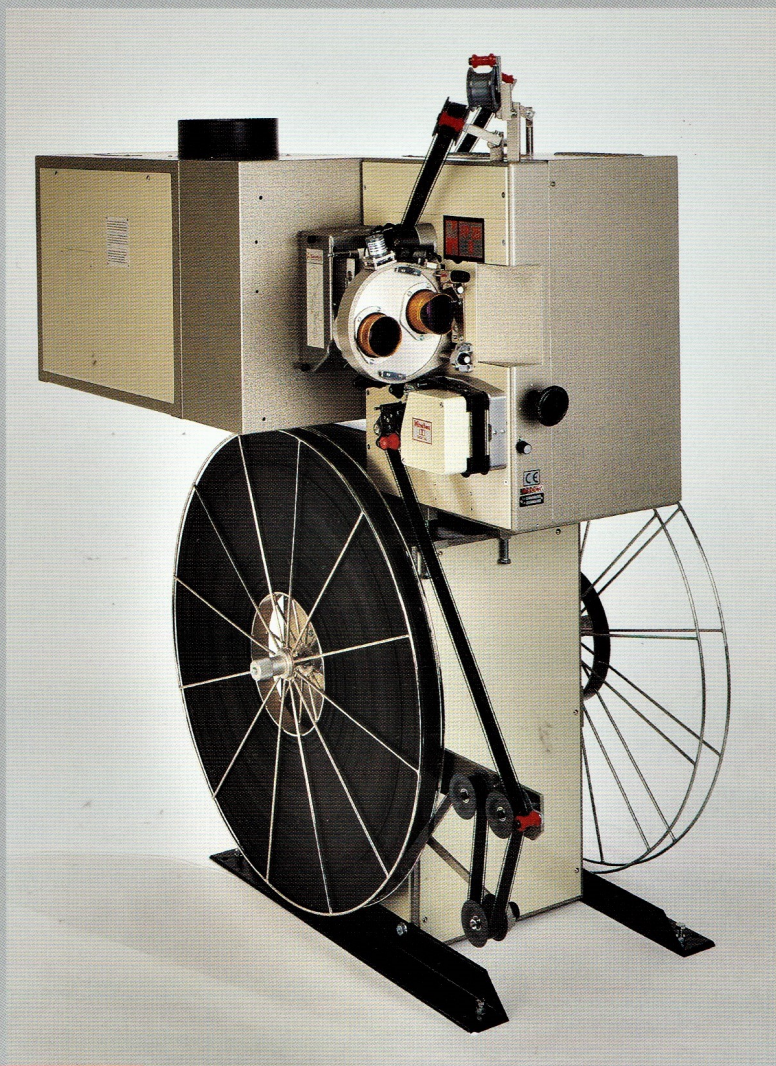

Projector FP 25 D

Exceptional Versatility:

- ideal for permanent installation as well as outdoor events, premieres, exhibitions and special venues demanding high quality projection
- can be quickly installed and prepared for operation
- just like all Kinoton products: perfectly reliable and virtually maintenance-free

Projector Head:

- excellent picture steadiness and smooth film handling
- simple film guidance, simple operation

Light sources:

- lamp capacity from 700 W to 10,000 W
- optimum light output and distribution

Options:


- | | |
|--|--|
| <p>reel tower:</p> <ul style="list-style-type: none"> ■ electronically controlled feed and take-up ■ versions for 4000 m (13,000 ft) or 5000 m (16,000 ft) of film ■ quick and easy adjustable speed ■ onboard rewind with automatic stop ■ low, constant film tension even at high rewind speeds protects the film | <p>reel rack:</p> <ul style="list-style-type: none"> ■ with mechanical feed clutch and motorised take-up ■ versions for 4000 m (13,000 ft) or 5000 m (16,000 ft) of film |
|--|--|

For more information visit our website:

www.kinoton.com/fp25d.htm

Technical Data:

Mains connection:	110 V / 120 V / 220 V / 240 V
Mains frequency:	50 Hz / 60 Hz
Power input (less xenon power supply):	1000 W
Net weight	
(incl. light source)	230 kg (500 lbs)
Gross weight	
(incl. light source)	330 kg (710 lbs)

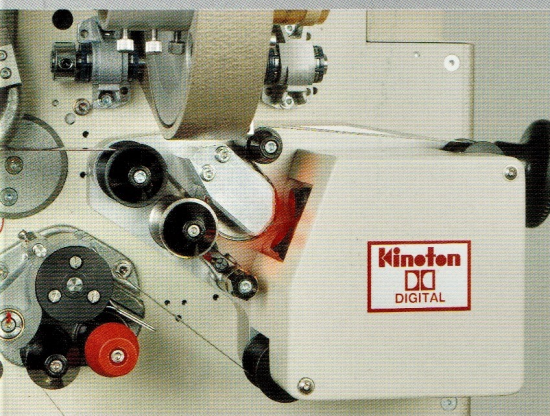

Reverse-Scan Sound Device

Options:

- Lens holder with quick-change mount, pre-adjustable to optimum focus, 70.6 mm or 101.6 mm diameter
- Manual lens turret for two or three 70.6 mm lenses
- Automatic lens turret and aperture changer for two or three 70.6 mm lenses
- Remote focusing control
- Remote framing control
- 35 mm optical sound device for Mono and Stereo prints
- Kinoton reverse scan sound device for 35 mm analog sound
- Kinoton reverse scan sound device for 35 mm analog sound and Dolby digital sound
- Sound readers for Dolby, DTS and Sony SDDS digital sound
- Various versions of lamphouse attachments for xenon lamps up to 10,000 W
- Film gate cooling unit for larger xenon lamps
- American or European standard reel shafts
- Full remote control of projector



Kinoton GMBH
Cinema and Studio Technology

E-mail: welcome@kinoton.de
Tel. +49(0)89/89 44 46-0
Fax +49(0)89/8 40 20 02
Industriestrasse 20a
D-82110 Germering