


The stable and robust SPT 5000 K spool tower was developed for booths with limited height and little space. As both reels (5000 m/17,000 ft—running time: approx. 3 hours) are mounted directly above the floor, the work of handling the large, heavy reels is a lot easier.

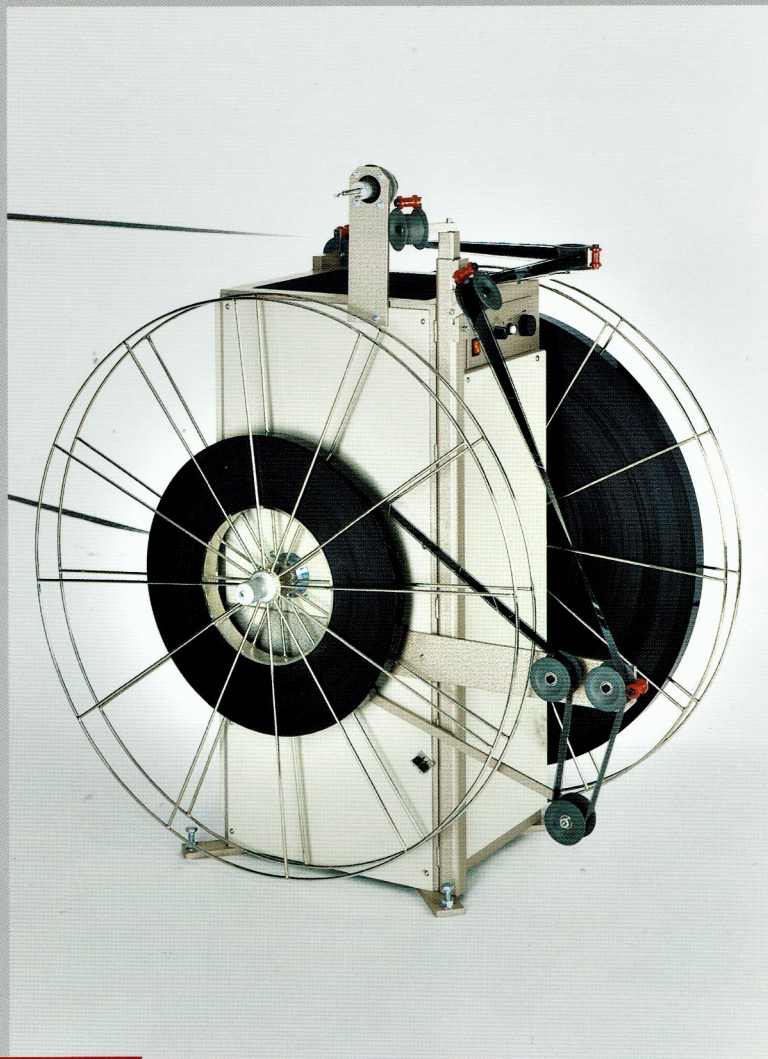


- high, infinitely variable rewind speed (15 min. for 5000 m/17,000 ft at maximum speed)
- electronically controlled reel motors for constant, low film tension—for minimum film wear and tear
- automatic stop after rewind
- work surface to make up and tear down film prints
- shaft adapter for 600 m (2,000 ft) split reels
- robust frame
- available in right-hand or left-hand versions
- easy installation and operation
- suitable for all projectors
- just like all Kinoton products: perfectly reliable and virtually maintenance-free

Spool Tower SPT 5000 K

For more information visit our website:

www.kinoton.com/spt5000.htm

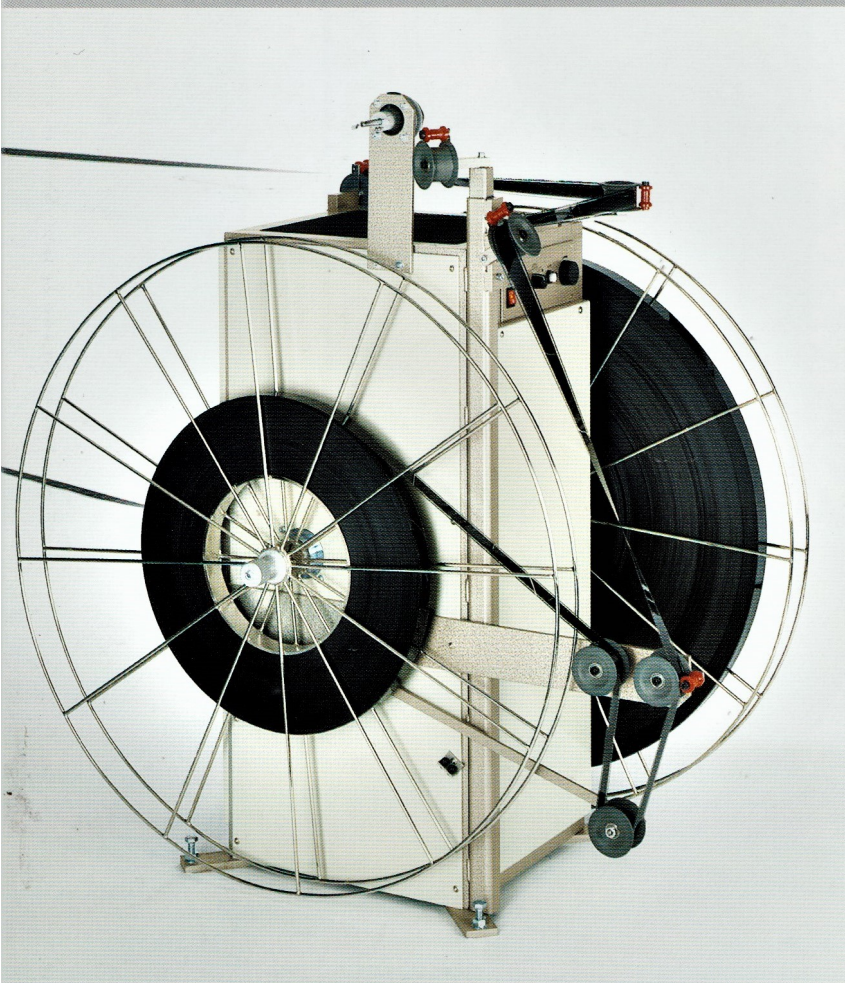

Version SPT 5000 K see separate product information

Technical data:

Mains voltage:	115 V / 120 V / 230 V / 240 V
Mains frequency:	50 Hz / 60 Hz
Power:	400 VA
Net weight:	120 kg (270 lbs)
Gross weight:	210 kg (470 lbs)
Film spools:	shaft diameter: 12.7 mm (1/2 inch) core diameter: 280 mm (11 inches) minimum



Kinoton GMBH
Cinema and Studio Technology

E-mail: welcome@kinoton.de
Tel. +49(0)89/89 44 46-0
Fax +49(0)89/8 40 20 02
Industriestrasse 20a
D-82110 Germering