


The SPT 5000 spool tower is a stable and robust device for film reels containing up to 5000 m (17,000 ft) of film (running time: approx. 3 hours).

The electronically controlled friction motors guarantee a constant, low film tension at any diameter and therefore minimum wear and tear on the film.

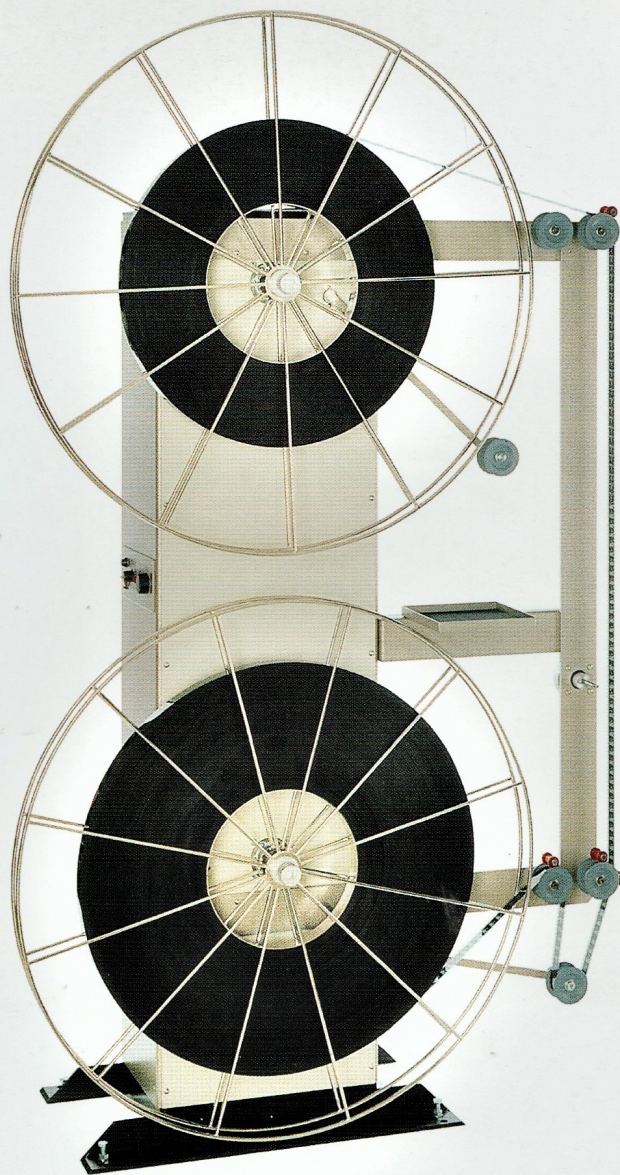


Spool Tower SPT 5000

- high, infinitely variable rewind speed (15 min. for 5000 m / 17,000 ft at maximum speed)
- automatic stop after rewind
- built-in workplace for splicing
- shaft adapter for 600 m (2,000 ft) split reels
- robust frame
- available in right-hand or left-hand versions
- sets of guide rollers available for different locations and distances from the projector
- easy installation and operation
- suitable for all projectors
- just like all Kinoton products: perfectly reliable and virtually maintenance-free

For more information visit our website:

www.kinoton.com/spt5000k.htm

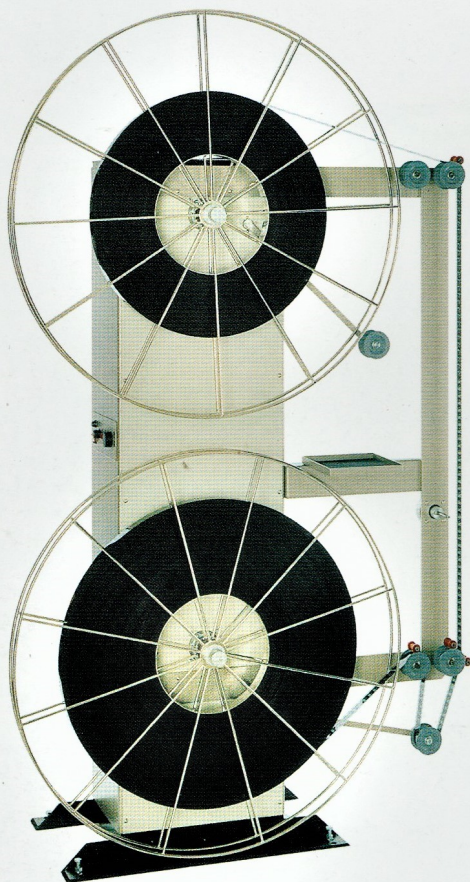

SPT 5000 version see separate product information

Technical data:

Mains voltage:	115 V / 120 V / 230 V / 240 V
Mains frequency:	50 Hz / 60 Hz
Power:	400 VA
Net weight:	125 kg (280 lbs)
Gross weight:	195 kg (430 lbs)
Film spools:	shaft diameter: 12.7 mm (1/2 inch) core diameter: 280 mm (11 inches) minimum



SPT 5000 K operating panel



Kinoton
Cinema and Studio Technology



E-mail: welcome@kinoton.de
Tel. +49(0)89/89 44 46-0
Fax +49(0)89/8 40 20 02
Industriestrasse 20a
D-82110 Germering