
FP 20 SERIES 35mm MOTION PICTURE PROJECTOR TYPE LCB0020

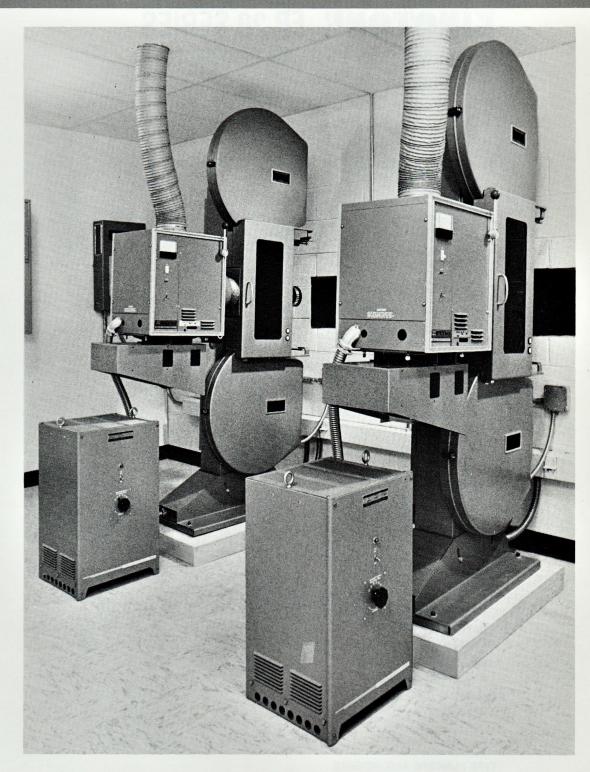

The KINOTONE FP 20 projector contains the latest developments in the field of cinematography...combining maximum performance reliability with exceptional design simplicity. Its principal features include:

- Simple drive mechanism with a minimum of transmissions.
- Easy film threading, few parts on film path
- Framing device of special design

- Minimum maintenance
- Built-in Optical Soundhead.
 (Four-track Magnetic soundhead also available)
- Outstanding picture steadiness; watercooled curved film gate
- Suitable for all types of 35mm films
- Easy interchange of projection lenses without re-focusing
- Suitable for all types of arc and Xenon lamps

- · Automatic film break switch
- Double-speed single-blade shutter provides extremely high light efficiency
- Optional Remote Focus and Remote Framing available
- Equipped with arc lamp bracket
- Built-in changeover

Adaptable to automated programming

KINOTONE FP 20 SERIES

35mm MOTION PICTURE PROJECTOR TYPE LCB0020

GENERAL SPECIFICATIONS

PROJECTION

- Film Width: 35mm
- Linear Film Speed:
 24 frames per second
- Film Capacity:
 3000 feet
 6000 feet (adaptable for automation)
- Shutter Efficiency: 54%
- Motor: Non-synchronous 110/220V, 60 c/s
- Projection Angle:
 Adjustable from +15° upward to 25° downward
- Intermittent Mechanism: 90° pull-down. Optional: 60° pull-down
- Lensholder: For 2-25/32" diameter lenses For 4" diameter lenses
- Lensturret: Optional

SOUND

Optical

PEC—type 3546PW—Voltage: 90V nominal (reducible to 65V for balancing)

Exciter Lamp: Philips 5V, 4A Prefocus type 7251C

Solar Cell: Philips Type EL 4402

Magnetic Optional

TYPE NUMBERS AND WEIGHTS

Kinotone Inc. reserves the right to make changes in design, construction and specifications, details of which do not appear in this catalog issue.



150 Atlantic Street, Hackensack, New Jersey 07602