




# Film Waxers

(35 mm. & 16 mm. MODELS)

*Patent Applied For*

- ★ Oilite bearings
- ★ Duralumin rollers
- ★ Ball bearings to main roller
- ★ Channelled base plate for easy removal
- ★ Non-magnetic
- ★ Precludes the heavy cost of process waxing

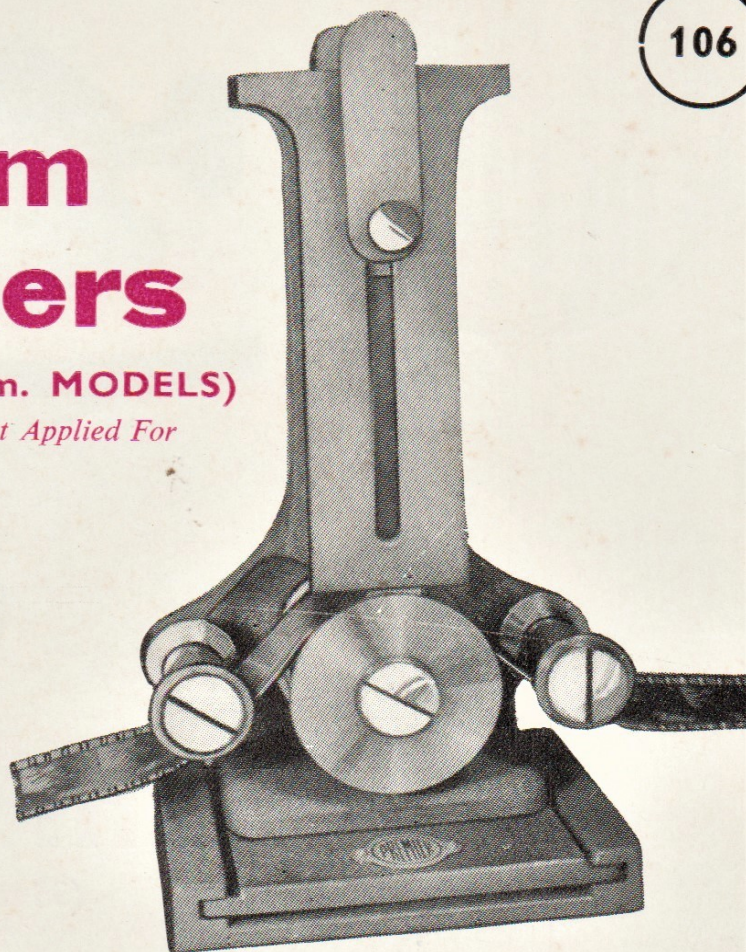

This latest model Film Waxed constitutes a considerable improvement in design and efficiency on all portable Waxers at present manufactured. It is designed to prevent the emulsion sticking with all the subsequent mutilation hazards during projection.

The outstanding features of this new device are: the threading arrangements whereby the film can be inserted and withdrawn at any time during the processing, thus facilitating the splicing of joins when necessary; introduction of sturdy oil impregnated bearings thus eliminating the necessity for frequent oiling; and the precision balanced weight with special wax retaining clips, by which instantaneous engagement or disengagement of the wax with the film may be effected.

The wax strips are specially made from imported Waxes of the finest grades; they are non-spreading and will coat only the edges of the film without causing deleterious effects to the sound track or sprocket holes.


The waxer is supplied with a channelled fixing base plate to enable it to slide into position or to be quickly removed and stored out of the way when not in use. Two models are manufactured—one for 35mm., the other for 16mm. (which is equally effective for waxing either sound or silent film stock).

This device which is compact and superbly finished represents the very latest in precision equipment for film waxing which the manufacturers are proud to offer to the trade.

(Please specify 35mm. or 16mm. Model when ordering)

176NS  
Box of WAX  
6/-



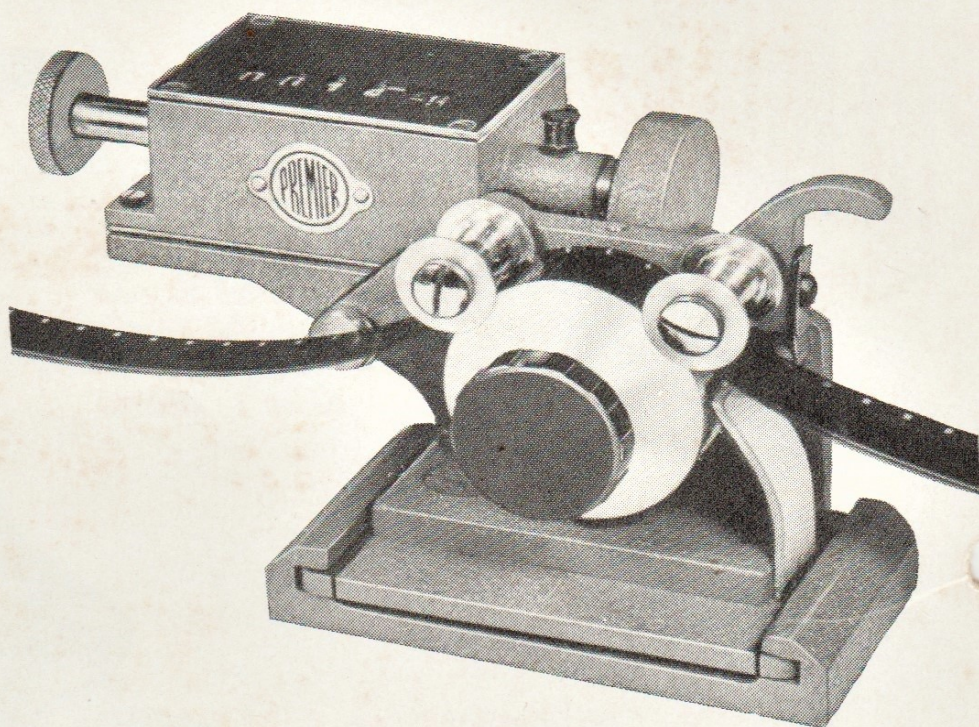

## Film Measurers

(35 mm. and 16 mm. Models)

This well-designed piece of Equipment is machined to a fine degree of accuracy and is in use in leading Renting Houses, Laboratories, Film Libraries, Cinemas, etc.

### Special Features

- ★ Polished Non-Magnetic Dural Sprocket fitted with suspended guide and tension rollers to allow for correct clearance of film.
- ★ Direct reading counter up to 10,000 feet which can be readily set to zero with the thumb screw provided.
- ★ The whole unit slides into a channelled baseplate which can be permanently fixed to the Rewind Table.
- ★ Models available for Horizontal or Vertical use.
- ★ 35 mm. Model specially designed for use with either Cinema-Scope (Fox hole) or Standard size sprocket hole.

#### MEASURER/FRAME COUNTER

The above models can be supplied fitted with a Tripping Knob and Counter for measuring to the nearest frame enabling the matching of dupe to master or for the exact timing of commercials or scripted shots, etc.