




SENIOR EDITING REWINDER

110

FEATURES

- ★ Models for 35 mm., 16 mm., or Combined 35/16 mm.
- ★ Adjustable tension protects film when operating sprocketed ancilliary equipment.
- ★ Helical gears to avoid "snatch".
- ★ Retractable Counterweighted Handle.
- ★ Film Keep and On/Off Plate for handling unspooled film up to 2,000 feet capacity.

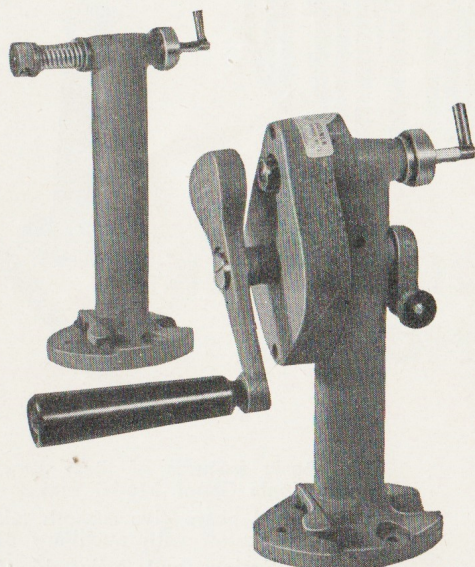

SPECIFICATION

A precision made **REWINDER** comprising cast upright columns fitted with smooth running heavy duty 3 : 1 ratio gearing.

The cranking movement operates within a comfortable radius most suitable for editing and film inspection and the spindles are fitted with sprung snick ends for the easy loading of spools.

Attractively finished in Grey Polychromatic Stove Enamel.

FILM KEEP and ON/OFF PLATE (as illustrated)

Comprising an On/Off Plate against which a sprung bar (Film Keep) controls the rewinding of unspooled film.

The Disc is fitted with a removable adaptor to accommodate when necessary the bakelite hubs on which processed film is often supplied. The Film Keep Bar is detachable or can be left in a hinged over position.

REWINDER (One Geared and One Idle End)

EDITOR (Two Geared Ends)

For combined 35 mm. and 16 mm. use Models can be supplied with Spacing Pieces


Extra

35 mm. or 16 mm. On/Off Plate


35 mm. or 16 mm. Film Keep

Extra for Combined 35/16 mm. Film Keep

Base Board extra

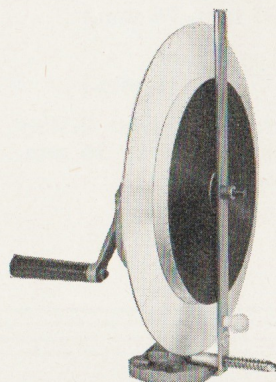

MULTI-TRACK MODELS

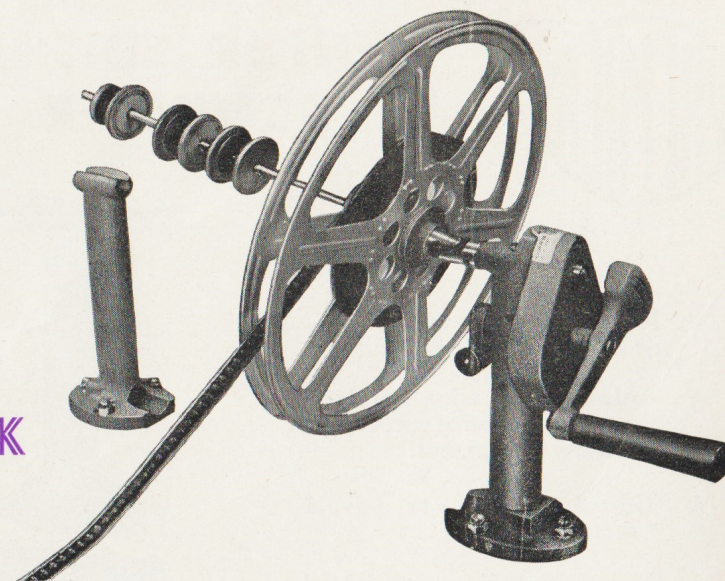

The basic features of these Rewinders (Brake Tension, etc.) in common with the Single Spool Model makes them ideally suited to multi-track work.

The helical gears give smooth take-up and the adjustable brake maintains correct film tension with ancilliary equipment (Synchronisers, etc.).

Spacing Springs and Adjustable Spool Clamp permit spool slip between the various tracks, and as is usual the first spool is provided with a positive take-up.

The 4-Way Model comprises two geared uprights fitted with long spindles hinged on a universal joint to facilitate spool loading, and the spindles are suspended on separate support castings for absolute rigidity and ease in use.

The 2-Way Model has the same features except that it is not supplied with the hinged spindle or auxiliary support.

4-Way Model
(35 mm./16 mm.)

2-Way Model
(35 mm./16 mm.)

Extra to convert 2-Way
unit to 3-Way 16 mm.
use

2-Way Model

