

DE LUXE MODEL 1000/2000 WATT

(For illustration see front cover.)

THE LAMPHOUSE is similar to that of the Standard 1,000/2.000 watt Models but is fitted with a wide aperture Achromatic lens (of varying foci from 16 ins. to 26 ins. only.) The addition of this lens gives the projector the highest possible light output and is designed for use where only the maximum screen brilliance and optical qualities will suffice.

1000 WATT

2000 WATT

(with Standard Slide Carrier) (with Standard Slide Carrier) $\frac{£35 - 0 - 0}{Carrier}$ (with Standard Slide Carrier)

(with Universal Slide Carrier) (with Universal Slide Carrier)

Projector Stands

HEAVY MODEL

A rigid stand most suitable for the 1,000/2,000 Watt De Luxe and Standard Models and featuring slotted stays and top bars to allow for tilting up or down 0/25°. The whole unit is collapsible for easy transportation.

PRICE: = £6 - 15 - 0 £8

LIGHT MODEL

A light stand primarily for use with the 500 Watt Model projector and which folds up completely in a matter of seconds. Ideal for speedy erection and transportation where equipment is constantly being moved.

PRICE: £5 15 0 £6 6s. Od.

Extension Tubes

Are available when fitting lenses of foci over 12" on 500 watt model and 26" on 1,000/2,000 watt Models. These tubes are supplied in two sizes and screw neatly into place between lens mount and front tube.

4'' Extension $\frac{21-7-0}{6''}$ £1 . 12 . 0 £1 . 16 . 0

Slide Boxes


Neatly constructed in metal with grooves to hold up to 50 slides 3½ in. by 3½ in. or 4 in. by 3½ in.

PRICE: £1 17 6 £2.5.0



SLIDE PROJECTORS


(Filament Lamp Models)



De Luxe Model



500 WATT MODEL

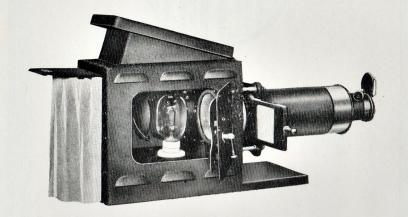

1000/2000 WATT MODEL



FEATURES

This portable model has been designed for small halls and classrooms, giving a most pleasing performance up to 30 feet with variable picture size from 7 to 12 feet.

LAMPHOUSE

Rigidly constructed in sheet steel with hinged roof, two light tight doors with plastic handles, and tinted eyepieces; well louvred inside and fitted with linings for maximum ventilation; spring loaded runners for the lamp outfit. This duality allows easy operation of the projector from either side.

ILLUMINANT

Comprises tray, pin, arm and clip, E.S. lamp-holder, and glass reflector with lateral, horizontal and vertical adjustments for focussing.

DIMENSIONS (with front tube closed)
15 inches high by 24 inches long by 21 inches wide.

500 WATT

GENERAL SPECIFICATIONS

THE OPTICAL ASSEMBLY. Embodies a fine adjustment rack and pinion movement, fine quality 2" diameter projection lens with spring loaded flasher for instantaneous or gradual fades. The front tubes extend smoothly to accommodate lenses of varying foci.

THE SLIDE CARRIERS are of all metal construction; the STANDARD to take 34 in. by 34 in. slides and accommodates both 34 in. by 34 in. and 4 in. by 34 in. slides. Adaptors are available at extra cost to hold 2 in. by 2 in. film slides.

FINISH. All projectors are attractively finished in grey enamel.

(When ordering please state lens focus required or picture size desired and length of throw. For lenses over 12" focus on 500 watt Model and over 26" on other models extension tubes must be fitted (see Accessories).)

1000 WATT



Lamps extra at current manfacturers cost.

FEATURES

This larger model has been designed—as a static or portable unit—with a high optical light output and gives an unprecedented performance. With 1,000 watt lamp it is suitable for throws up to 60 feet; with 2,000 watt lamp it is suitable for even longer throws—in fact the result compares favourably with that of a carbon arc.

LAMPHOUSE

Rigidly constructed in sheet steel with two light tight doors and tinted eyepieces; well louvred inside and fitted with internal lining for maximum ventilation; runners to accommodate focussing attachment: asb stos curtain. Can be operated from either side.

ILLUMINANT

Comprising tray, pin, lampholder arm and clip. GES lampholder and glass reflector with lateral horizontal and vertical adjustments for focussing. DIMENSIONS (with front tubes closed) 1 ft. 5½ ins. high 3 ft. 1 in. long 1 ft. 9 ins. wide

2000 WATT

(with Standard Stide Carrier)

(with Universal Stide Carrier)

Lamp Extra 25/- 93/6