




AUTOMATIC TAPE SPLICER

(35 mm. Model)

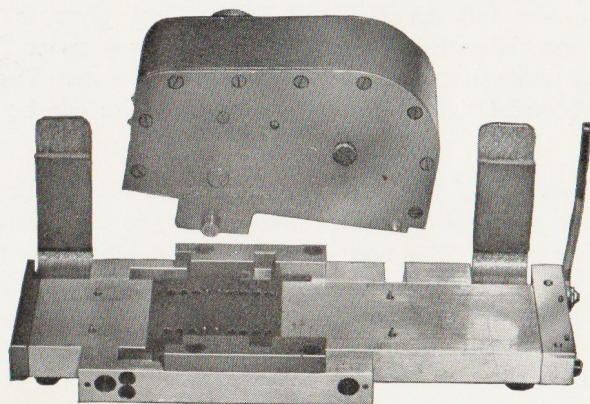

- ★ NON MAGNETIC AND AUTOMATIC
- ★ GIVES A BUTT OR OVERLAP JOIN
- ★ STRAIGHT OR DIAGONAL
- ★ PERFECT FOR JOINING MAGNETIC FILM
- ★ NO LOSS OF A FRAME WHEN JOINING PICTURE
- ★ MENDS TORN FILM OR DAMAGED SPROCKET HOLES

"PREMIER" AUTOMATIC TAPE SPLICER

SPECIFICATION

The "PREMIER" AUTOMATIC TAPE SPLICER is a necessity to anyone wanting to make perfect butt joins. With Magnetic Coated Stock this is particularly necessary where silent splices are so essential. When making a butt splice no frames are lost and the splices can readily be undone by peeling off the adhesive tape. Straight or diagonal splices can be made.

An OVERLAP JOIN can be achieved by fitting a spacer between the knife and cutting edge and full details for doing this are given in the Instruction Leaflet. The splicer is entirely non-magnetic. It uses either "Permacel" or "3M" Perforated Adhesive Tape, or any other Perforated Tape of a similar nature. With "Permacel" Clear Tape optical sound film can be spliced entirely satisfactorily.


The Splicer consists of two parts—the Base and the Applicator. The Base incorporates a non-magnetic Cutter at one end. The Applicator contains the perforated adhesive Tape. The film is trimmed and placed on the Centre Pins then a precut length of adhesive tape (two Standard Frames) is rolled on to the trimmed film thus effecting a perfect splice. The Splicer is extremely robust, easily serviced and precision made. It is constructed of non-magnetic materials and attractively finished.

Price

Tape is supplied extra at current prices.

NON MAGNETIC CUTTER

- ★ Quick and accurate cutting
- ★ Robust and NON magnetic

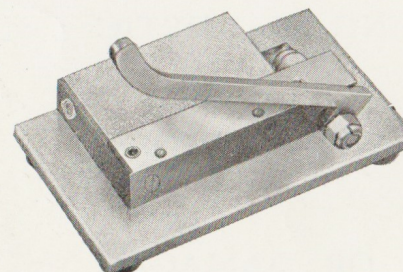

This Premier non magnetic cutter is ideal in a cutting room for preparing films for joining. It is far more accurate and quicker than using scissors. It is more than useful when used in conjunction with the Premier Automatic Tape Splicer.

The Cutter is made of non magnetic materials